


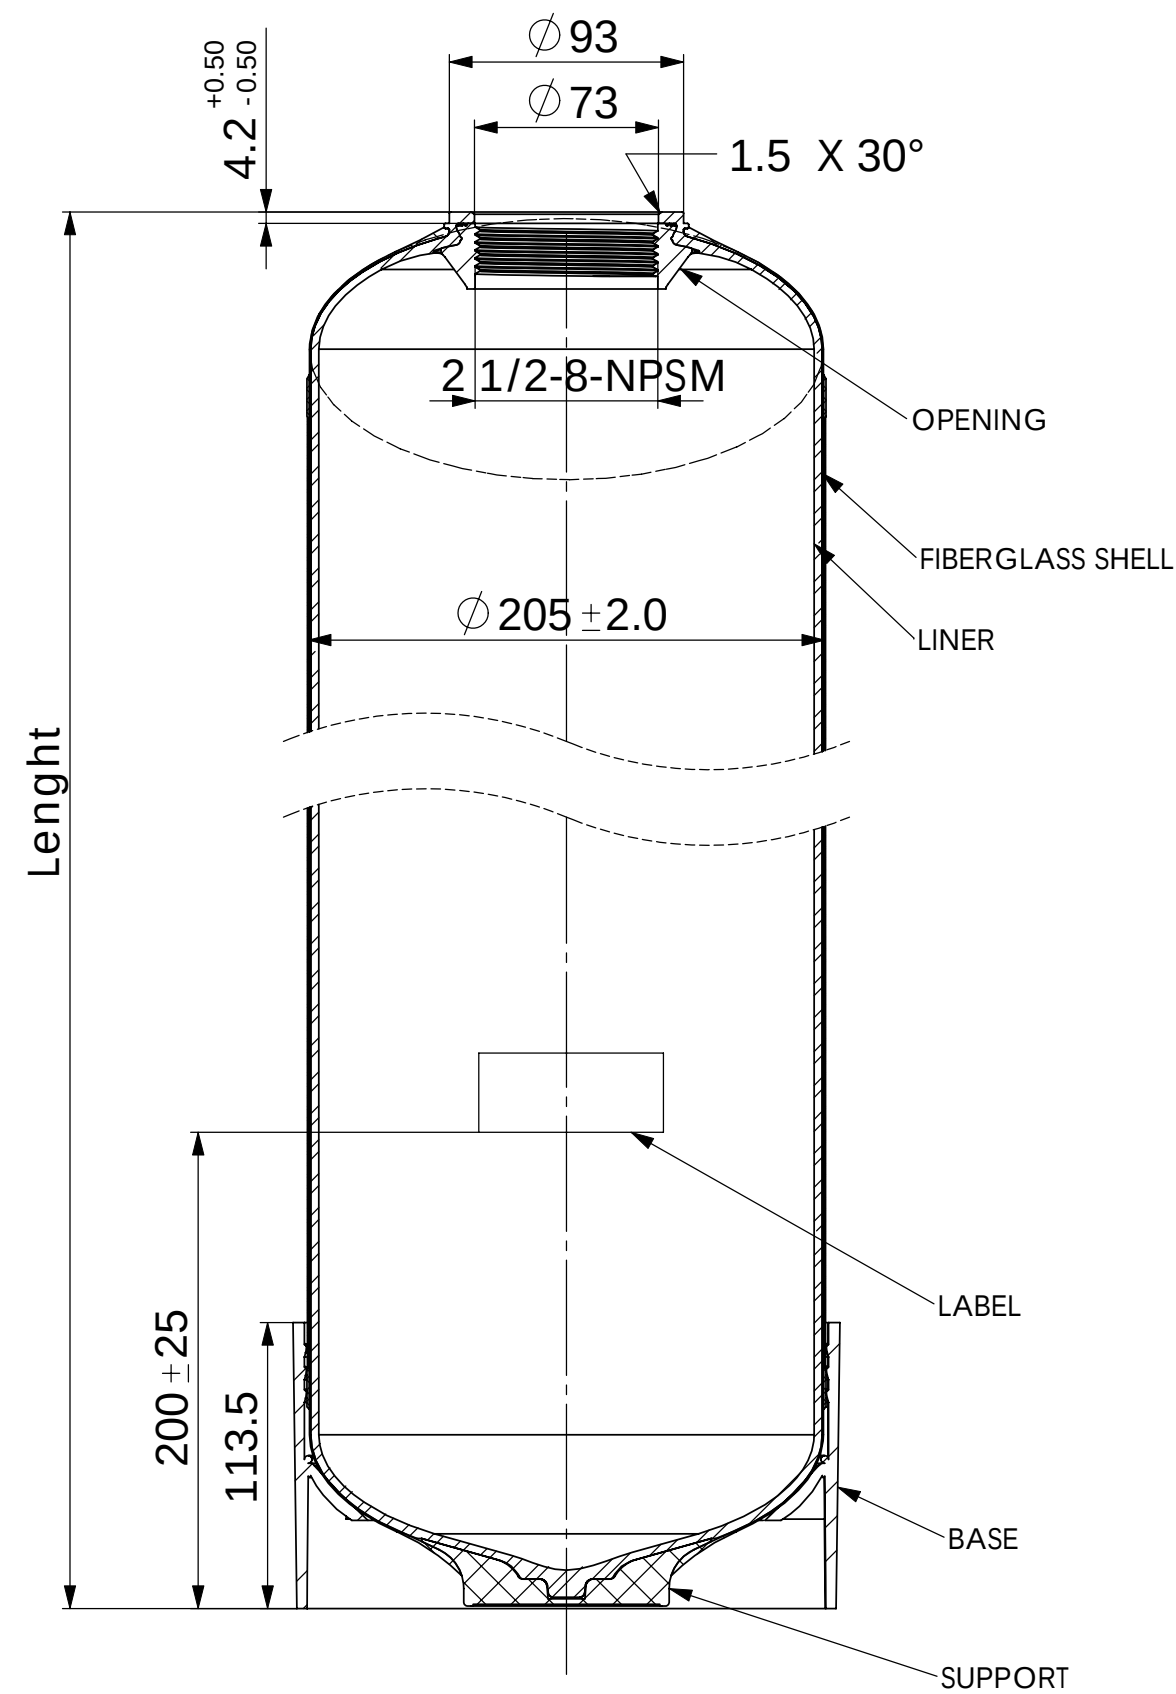

DATA SHEET							
MODEL	Length			VOLUME		WEIGHT	
	mm	inch	+/-	Liters	CU.Ft	Kg	LBS
08×15	385	15.16	3	9.3	0.33	1.83	4.03
08×17	437	17.2	4	10.5	0.37	2.3	5.06
08×18	462	18.19	4	11.5	0.41	2.55	5.61
08×24	615	24.01	4	16.6	0.59	2.94	6.47
08×26	665	26.18	4	18.1	0.64	3.15	6.93
08×30	770	30.31	4	21	0.74	3.65	8.03
08×35	897	35.3	4	23.6	0.83	4.05	8.91
08×44	1122	44.17	4	31.3	1.11	4.45	9.79

NOTES:

1. TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD,LATEST REVISION.
2. OPERATING SPECIFICATIONS:

A. MAXIMUM WORKING PRESSURE - 150PSI (10.5BAR)

B. TEMPERATURE RANGE - 34-122 °F (1-50 °C)

C. MAXIMUM VACUUM - 5.5"Hg (140mm Hg)

D. MEDIA - WATER
3. TEST REQUIRMENT

A. BURST PRESSURE TEST: 4.2MPa

B. CYCLIC PRESSURE TEST: 1.05MPa / 100,000 CYCLES

C. HYDROSTATIC PRESSURE TEST: 2.52MPa / KEEP 15MINS
4. VISUAL LINER INSPECTION

A. NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.

B. NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 x 3mm

C. NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED
5. ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED
6. LABEL'S POSITION CAN BE CHANGED WITH THE CUSTOMER'S REQUIREMENT

				開能 CANATURE GROUP	
				08" FRP PRESSURE VESSEL With Base	
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE
DESIGNER		STANDARD	STAGE REMARK	NUMBER /SET	SCALE
				1	1:3
INSPECTION		AUTHORIZATION	PROJECTION	FRP-PV.08.00	
TECHNOLOGIST			TOTAL PAGES:	PAGE NO.	