
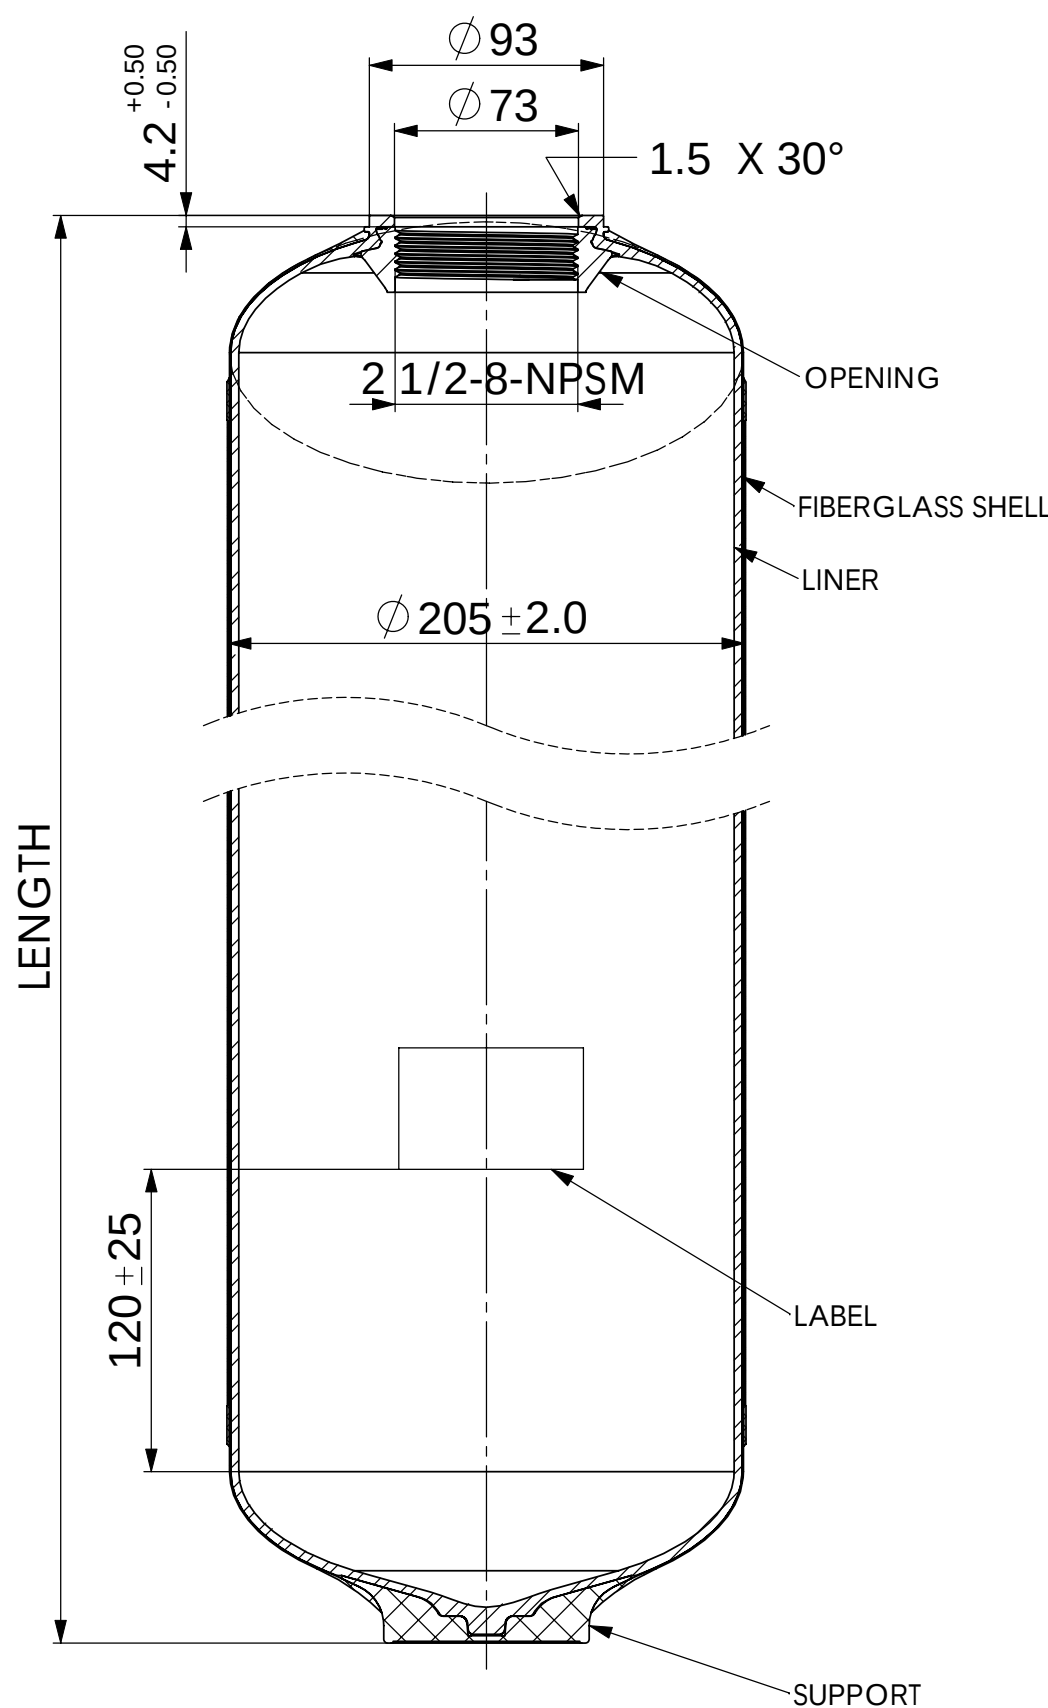




DATA SHEET							
MODEL	Length			VOLUME		WEIGHT	
	mm	inch	+/-	Liters	CU.Ft	Kg	LBS
08×15	381	15	3	9.3	0.33	1.48	3.26
08×17	432	17	4	10.5	0.37	1.95	4.29
08×18	458	18.03	4	11.5	0.41	2.2	4.84
08×24	610	24.01	4	16.6	0.59	2.59	5.70
08×26	661	26.02	4	18.1	0.64	2.8	6.16
08×30	765	30.12	4	21	0.74	3.3	7.26
08×35	891	35.08	4	23.6	0.83	3.7	8.14
08×44	1118	44.02	4	31.3	1.11	4.1	9.02

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD,LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-122 °F (1-50 °C)
 - MAXIMUM VACUUM - 5.5"Hg (140mm Hg)
 - MEDIA - WATER
- TEST REQUIRMENT
 - BURST PRESSURE TEST: 4.2MPa
 - CYCLIC PRESSURE TEST: 1.05MPa / 100,000 CYCLES
 - HYDROSTATIC PRESSURE TEST: 2.52MPa / KEEP 15MINS
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 x 3mm
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED
- LABEL'S POSITION CAN BE CHANGED WITH THE CUSTOMER'S REQUIREMENT

								開能 Canature CANATURE GROUP	
VERSION NO.	DESCRIPTION OF CHANGES:					SIGNATURE	DATE	08" FRP PRESSURE VESSEL	
DESIGNER			STANDARD	STAGE REMARK			NUMBER /SET	SCALE	/
							1	1:3	MATERIAL:
INSPECTION			AUTHORIZATION	PROJECTION					FRP-PV.08.00
TECHNOLOGIST				TOTAL PAGES:			PAGE NO.		