


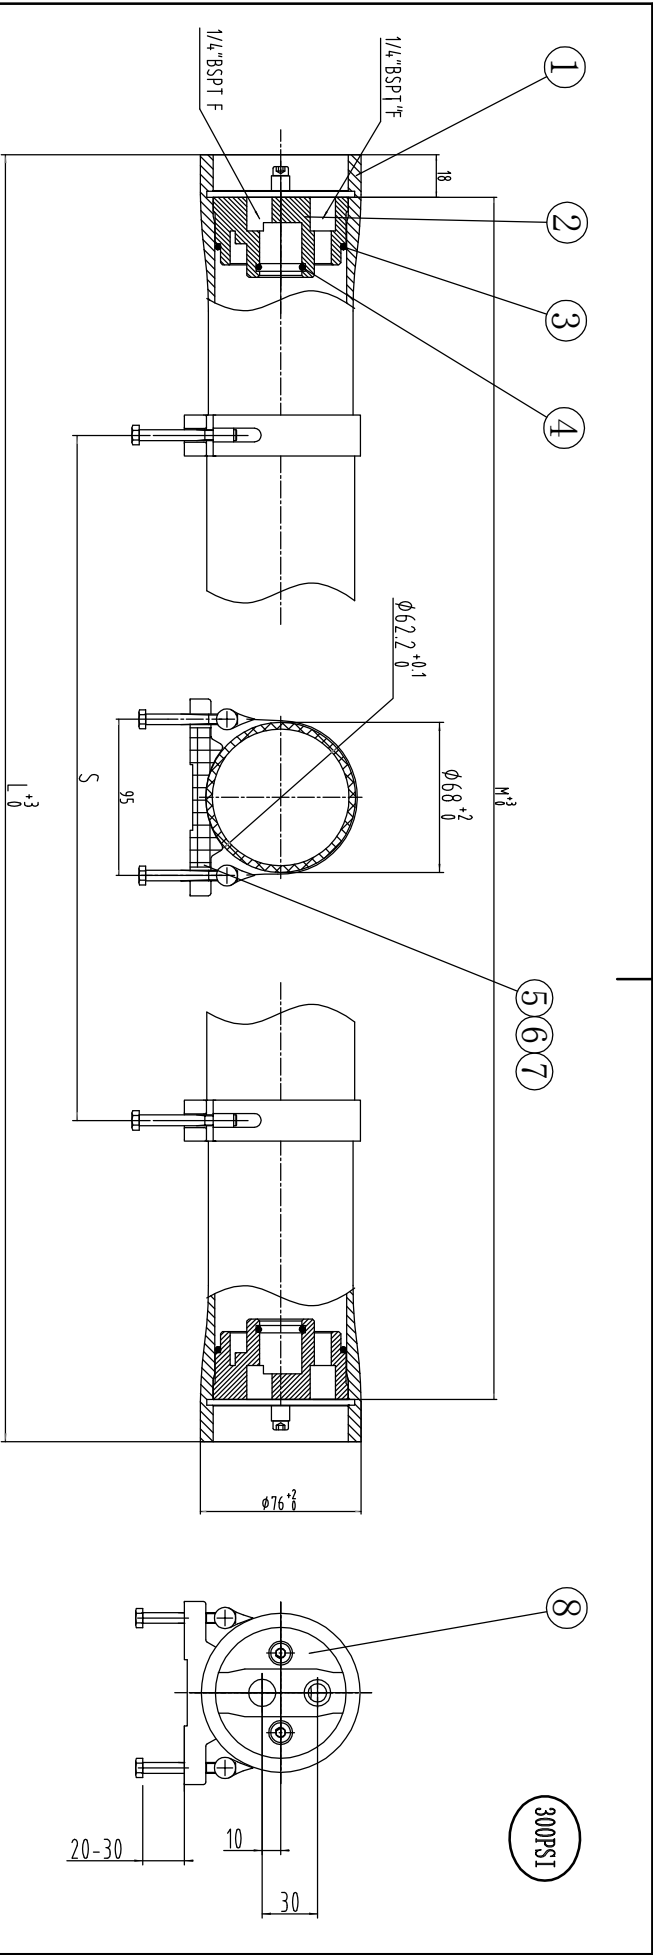

Model	Part Number	L (MM)	M (MM)	S (MM)	Apprx assembly weight (KG)	Rev
2540	F2530E-1	1088	1052	700	4	1215010003
2521	F2530E-2	605	597	400	2.1	1215010002
2514	F2530E-3	427	419	200	1.9	1215010001

Note:

1. Design pressure: 300PSI(21Bar)
2. Design temperature: 150°F(6°C)
3. Minimum temperature: 14°F(-10°C)
4. Working medium: Water,PH 3-11
5. Please operate in accordance with User Guide
6. Flexible piping should be used on permeate connection tomainfold
7. Subject to change without prior notice

8	Locking Crescent	F25L-04-01	4	304SST	
7	Strap	F25L-03-01	2	304SST-Rubber	
6	Strap Screw	F25L-86-01	4	304SST	M6x60
5	Saddle	F25L-02-01	2	Rubber	
4	O-Ring	F25L-59-01	2	EPDM	19x2.65
3	O-Ring	F25L-70-01	2	EPDM	56x3.55
2	End Plate	F25L-01-01	2	ABS	
1	Pressure Shell	See Selection Table	1	Epoxy FRP	White
Ref.	Description	Part Number	Qty.	Material	Remark

Pollet Water Group		
Design Date		Model F25-300E Pressure Vessel
Review Date		DRG F25-30-E-00-01
REV		1215010001/0002/0003

