
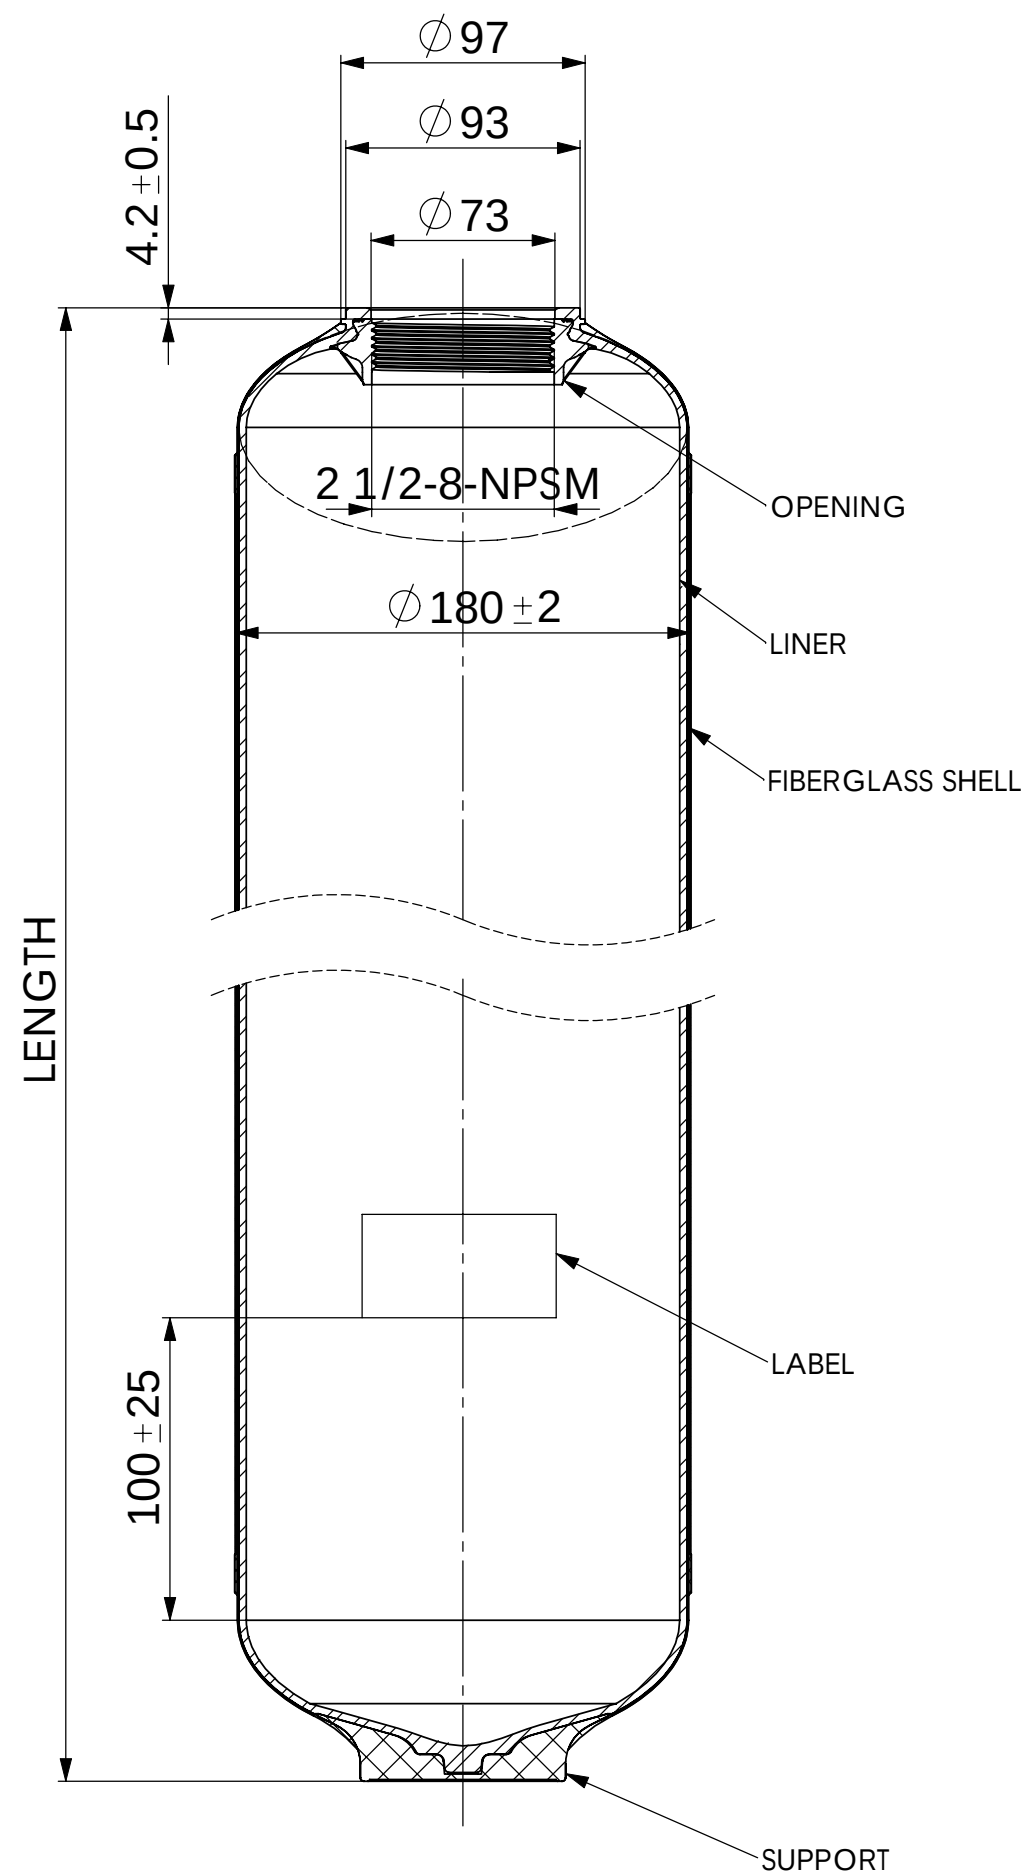




DATA SHEET							
MODEL	Length			VOLUME		WEIGHT	
	mm	inch	+/-	Liters	CU.Ft	Kg	LBS
07×13	331	13	3	6.3	0.22	1.2	2.64
07×17	432	17	4	8.5	0.3	1.45	3.19
07×19	484	19.05	4	9.72	0.34	1.85	4.07
07×22	562	22.13	4	11.43	0.4	2.2	4.84
07×30	763	30.04	4	15.8	0.56	2.4	5.28
07×35	891	35.08	4	19.1	0.68	2.68	5.9
07×44	1118	44.02	4	24.3	0.86	3.4	7.48

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD,LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-122 °F (1-50 °C)
 - MAXIMUM VACUUM - 5.5"Hg (140mm Hg)
 - MEDIA - WATER
- TEST REQUIRMENT
 - BURST PRESSURE TEST: 4.2MPa
 - CYCLIC PRESSURE TEST: 1.05MPa / 100,000 CYCLES
 - HYDROSTATIC PRESSURE TEST: 2.52MPa / KEEP 15MINS
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 x 3mm
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED
- LABEL'S POSITION CAN BE CHANGED WITH THE CUSTOMER'S REQUIREMENT

										 CANATURE GROUP	
											07" FRP PRESSURE VESSEL
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE					
DESIGNER			STANDARD	STAGE REMARK			NUMBER /SET	SCALE	/		
								1:3	MATERIAL:		
INSPECTION			AUTHORIZATION	PROJECTION					FRP-PV.07.00		
TECHNOLOGIST				TOTAL PAGES:			PAGE NO.				