


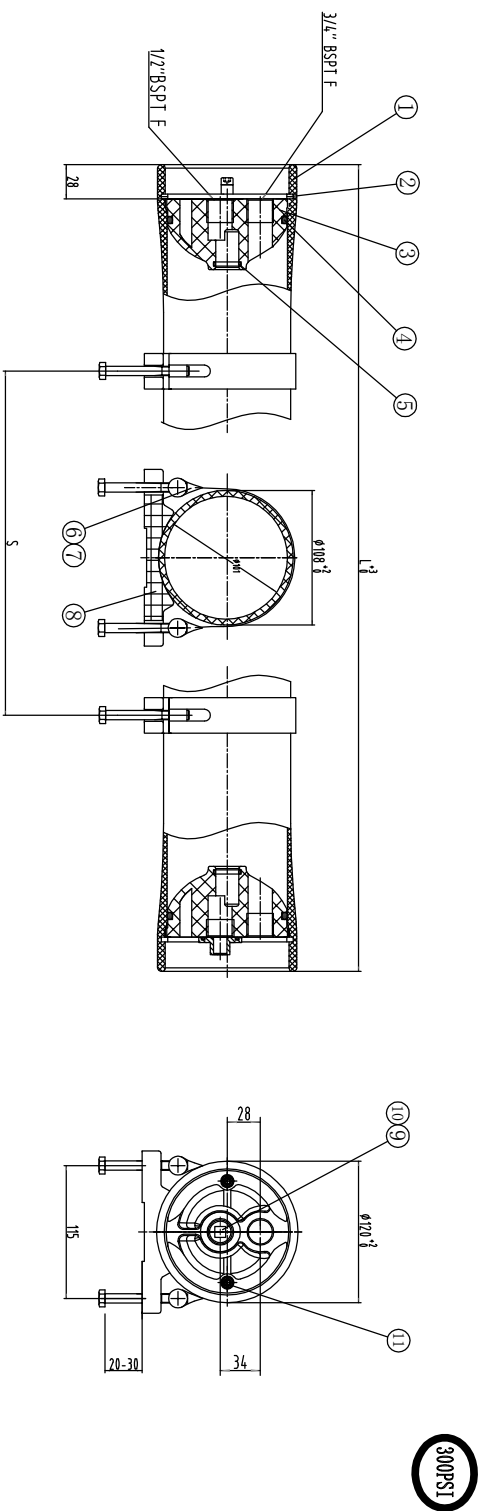

Model	Part Number	L (MM)	S (MM)	Approx assembly weight (KG)	REV
1	F4030E-2	2756	1200	9	1215020005
2	F4030E-3	3172	2200	12	1215020006

- Note:**
1. Design pressure: 300PSI(21Bar)
 2. Design temperature: 150°F(66°C)
 3. Minimum temperature: 14°F(-10°C)
 4. Working medium: Water, PH 3-11
 5. Piece operate in accordance with User Guide
 6. Flexible piping should be used on permeate connection to manifold
 7. Subject to change without prior notice

11	Locking Gasket Screw	F40L-88-01	4	304SSST	M6x14
10	O-Ring	F40L-53-01	4	EPDM	23.6x3.55
9	Plug	F40L-04-01	1	ABS	
8	Saddle	F40L-03-01	2~3	Rubber	
7	Strap Screw	F40L-83-01	4~6	304SSST	M8x70
6	Strap	F40L-02-01	2~3	304SSST-Rubber	
5	O-Ring	F40L-59-01	2	EPDM	19x2.65
4	O-Ring	F40L-58-01	2	EPDM	90x5.3
3	End Plate	F40L-01-02	2	ABS	
2	Locking Gasket	F40L-94-01	4	304SSST	
1	Pressure Shell	See Selection Table	1	Epoxy FRP	White

Ref	Description	Part Number	Qty.	Material	Remark
-----	-------------	-------------	------	----------	--------

Pollet Water Group			
Design Date		Model	
Review Date		DRG	
REV		1215020005/20006	

