


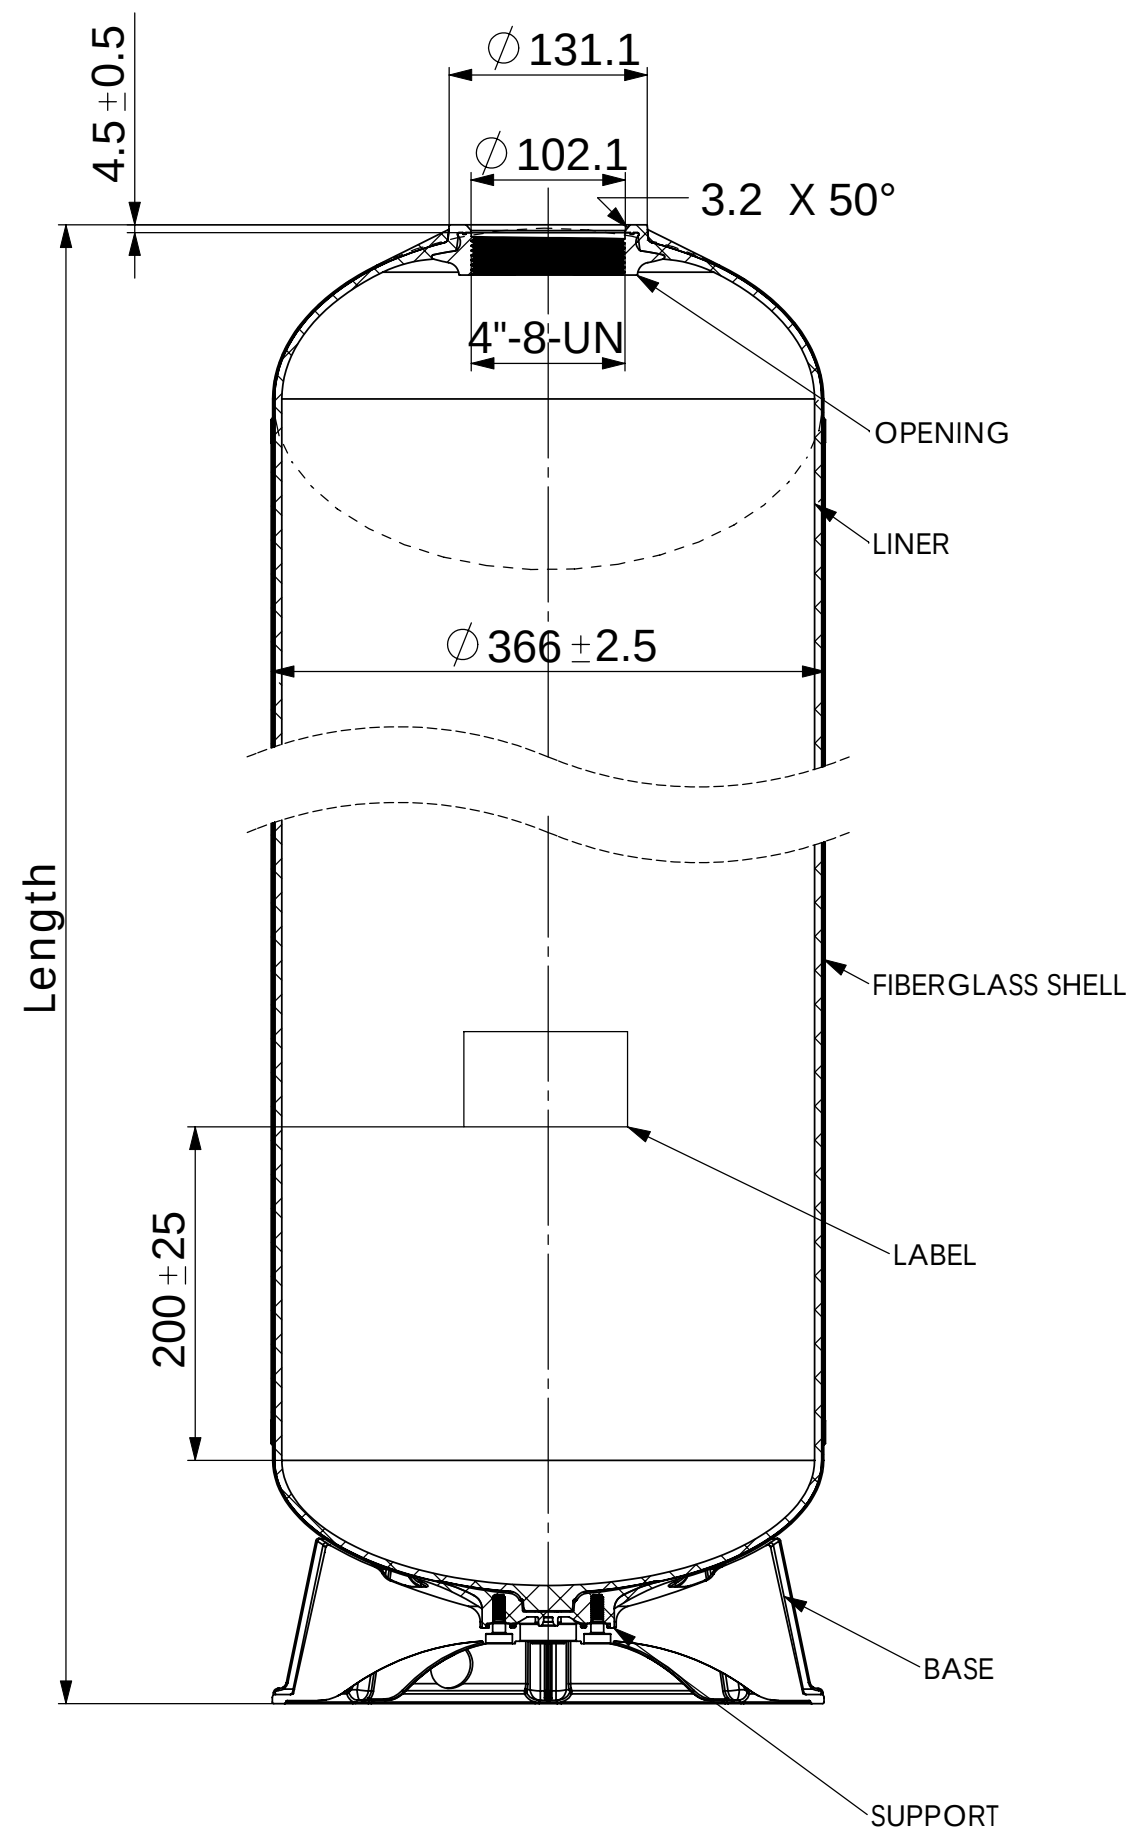

MODEL	Length			VOLUME		WEIGHT	
	mm	inch	+/-	Liters	CU.Ft	Kg	LBS
14×52	1344	52.91	4	115	4.06	10.9	23.98
14×65	1674	65.91	5	148	5.23	14.8	32.56

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD,LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-122 °F (1-50 °C)
 - MAXIMUM VACUUM - 5.5"Hg (140mm Hg)
 - MEDIA - WATER
- TEST REQUIRMENT
 - BURST PRESSURE TEST: 4.2MPa
 - CYCLIC PRESSURE TEST: 1.05MPa / 100,000 CYCLES
 - HYDROSTATIC PRESSURE TEST: 2.52MPa / KEEP 15MINS
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 x 3mm
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED
- LABEL'S POSITION CAN BE CHANGED WITH THE CUSTOMER'S REQUIREMENT

						開能 CANATURE GROUP Canature	
						14" FRP PRESSURE VESSEL (4"-8-UN Opening) With Base	
VERSION NO.	DESCRIPTION OF CHANGES:				SIGNATURE	DATE	
DESIGNER		STANDARD	STAGE REMARK		NUMBER /SET	SCALE	/
						1:5	MATERIAL:
INSPECTION		AUTHORIZATION	PROJECTION		SOURCING FROM:		
TECHNOLOGIST			TOTAL PAGES:		PAGE NO.		FRP-PV.14-4".00