

FLEXIBLE HOSES FOR CLACK VALVES



FOR CLACK VALVES

FLEXIBLE HOSES

At Pollet Water Group, we are dedicated to equipping water treatment professionals with premium solutions. That's why we've designed custom flexible hoses for Clack valves. With these hoses, there's no need for a Clack fitting assembly on the valve's inlet and outlet. The hose fitting replicates the Clack housing and utilizes Clack components for a direct, secure connection to the valve, ensuring superior thread compatibility and reducing the risk of leaks.

Our hoses are made from high-quality stainless steel braided flexibles, offering exceptional flexibility and durability. They are available in sizes from $\frac{3}{4}$ " to 1.5" and come in lengths of 800mm and 1500mm to suit various applications.

Additionally, we've developed flexible hoses for the Clack 1" and 1.5" Twin valves, designed to provide a direct connection while accommodating height differences between tanks.

Each hose set requires one fitting kit (two for twin sets), which includes two Clack o-rings, two split rings and two nuts for an easy and secure installation.





EASY INSTALLATION

No need for a Clack fitting assembly on the valve's inlet and outlet



DIRECT & SECURE CONNECTION

Ensuring superior thread compatibility and reducing the risk of leaks



HIGH-QUALITY STAINLESS STEEL BRAIDED FLEXIBLES

Exceptional flexibility and durability




DIFFERENT SIZE & LENGTH OPTIONS

From 3/4" up to 1.5", 800mm or 1500mm



AVAILABLE FOR 1" & 1.5" TWIN UNITS

Provides a direct connection while accommodating height differences between tanks

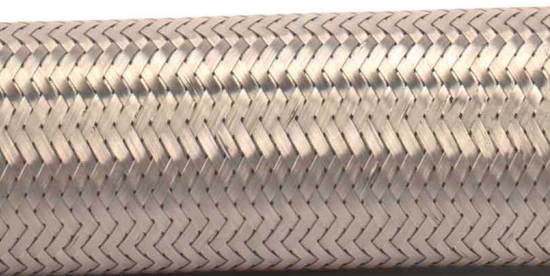

FLEXIBLE HOSES FOR CLACK VALVES

- SIMPLEX DN20 6
- SIMPLEX DN25 7
- SIMPLEX DN32 8
- SIMPLEX DN40 9
- TWIN DN25 10
- TWIN DN40 11

FLEXIBLE HOSES FOR CLACK VALVES

SIMPLEX DN20 CLACK QC - 3/4" F

DESCRIPTION

High-quality stainless steel braided flexible hose with 3/4" female and Clack QC connection.

Each hose set requires one fitting kit, which includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup




HOSES

2701130017	DN20 Clack QC - 3/4" F - 800 mm
2701130018	DN20 Clack QC - 3/4" F - 1500 mm

FITTING KIT

5303020460	Fitting Kit 3/4"-1.25"
-------------------	------------------------

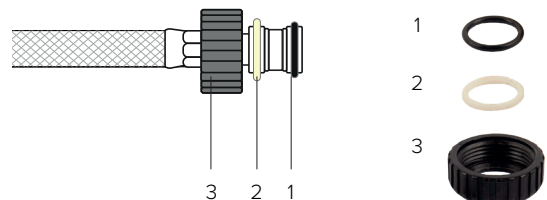

TECHNICAL SPECIFICATIONS

Braided hoses

DN	20
Material	Silicone
Braiding	Inox 12 x 0,22mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	19.5 x 26 mm

Sleeve

Dimensions	30 x 32 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP).

FLEXIBLE HOSES FOR CLACK VALVES

SIMPLEX DN25 CLACK QC - 1" F

DESCRIPTION

High-quality stainless steel braided flexible hose with 1" female and Clack QC connection. Each hose set requires one fitting kit, which includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup




HOSES

2701130020	DN25 Clack QC - 1" F - 800 mm
2701130007	DN25 Clack QC - 1" F - 1500 mm

FITTING KIT

5303020460	Fitting Kit 3/4"-1.25"
-------------------	------------------------

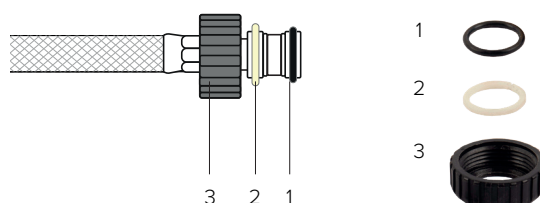

TECHNICAL SPECIFICATIONS

Braided hoses

DN	25
Material	Silicone
Braiding	Inox 12 x 0,22mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	25 x 32 mm

Sleeve

Dimensions	36 x 38 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP).

FLEXIBLE HOSES FOR CLACK VALVES

SIMPLEX DN32 CLACK QC - 1.25" F

DESCRIPTION

High-quality stainless steel braided flexible hose with 1.25" female and Clack QC connection.

Each hose set requires one fitting kit, which includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup




HOSES

2701130009	DN32 Clack QC - 1.25" F - 800 mm
2701130010	DN32 Clack QC - 1.25" F - 1500 mm

FITTING KIT

5303020460	Fitting Kit 3/4"-1.25"
-------------------	------------------------

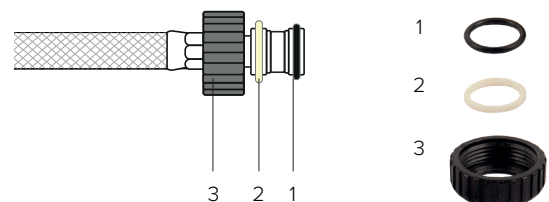

TECHNICAL SPECIFICATIONS

Braided hoses

DN	32
Material	Silicone
Braiding	Inox 10 x 0,25mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	32 x 42 mm

Sleeve

Dimensions	45 x 47 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP).

FLEXIBLE HOSES FOR CLACK VALVES

SIMPLEX DN40 CLACK QC - 1.5" F

DESCRIPTION

High-quality stainless steel braided flexible hose with 1.5" female and Clack QC connection.

Each hose set requires one fitting kit, which includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup




HOSES

2701130012	DN40 Clack QC - 1.5" F - 800 mm
2701130013	DN40 Clack QC - 1.5" F - 1500 mm

FITTING KIT

5303020461	Fitting Kit 1.5"
-------------------	------------------

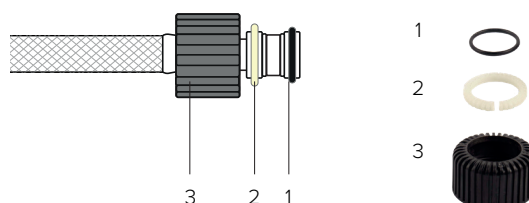

TECHNICAL SPECIFICATIONS

Braided hoses

DN	40
Material	Silicone
Braiding	Inox 10 x 0,25mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	40 x 52 mm

Sleeve

Dimensions	55 x 57 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP).

FLEXIBLE HOSES FOR CLACK VALVES

TWIN DN25 CLACK QC - QC

DESCRIPTION

High-quality stainless steel braided flexible hose with 2 Clack QC connections.

Each hose set requires **two fitting kits**.

A fitting kit includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup



HOSES

2701130001 DN25 Clack QC - QC - 290 mm*

2701130002 DN25 Clack QC - QC - 340 mm**


* suitable for up to 10" vessels

** suitable for up to 13" vessels

FITTING KIT

5303020460

Fitting Kit 3/4"-1.25"

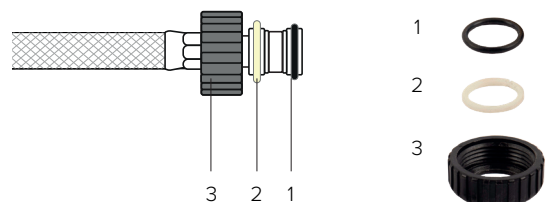

TECHNICAL SPECIFICATIONS

Braided hoses

DN	25
Material	Silicone
Braiding	Inox 12 x 0,22mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	25 x 32 mm

Sleeve

Dimensions	36 x 38 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP)

FLEXIBLE HOSES FOR CLACK VALVES

TWIN DN40 CLACK QC - QC

DESCRIPTION

High-quality stainless steel braided flexible hose with 2 Clack QC connections.

Each hose set requires **two fitting kits**.

A fitting kit includes:

- 2 x Clack o-rings
- 2 x split rings
- 2 x nuts for a secure setup



HOSES

2701130014	DN40 Clack QC - QC - 390 mm*
-------------------	------------------------------


2701130015	DN40 Clack QC - QC - 530 mm**
-------------------	-------------------------------

* suitable for up to 18" vessels

** suitable for up to 24" vessels

FITTING KIT

5303020461	Fitting Kit 1.5"
-------------------	------------------

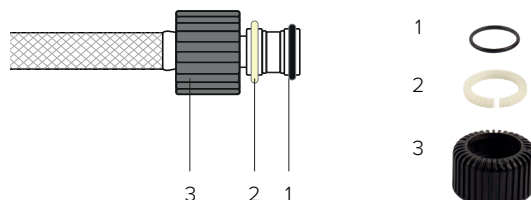

TECHNICAL SPECIFICATIONS

Braided hoses

DN	40
Material	Silicone
Braiding	Inox 10 x 0,25mm AISI304L
Nominal Pressure	6 bar
Peak Pressure	8 bar
Temperature (min./max.)	-60°C / 200°C
Diameter	40 x 52 mm

Sleeve

Dimensions	55 x 57 mm
Material	Inox

Certified hoses manufactured according to the European EN 13618 standards. Fittings comply with the European standards EN ISO 228-1 (BSPP).



Make water count.