


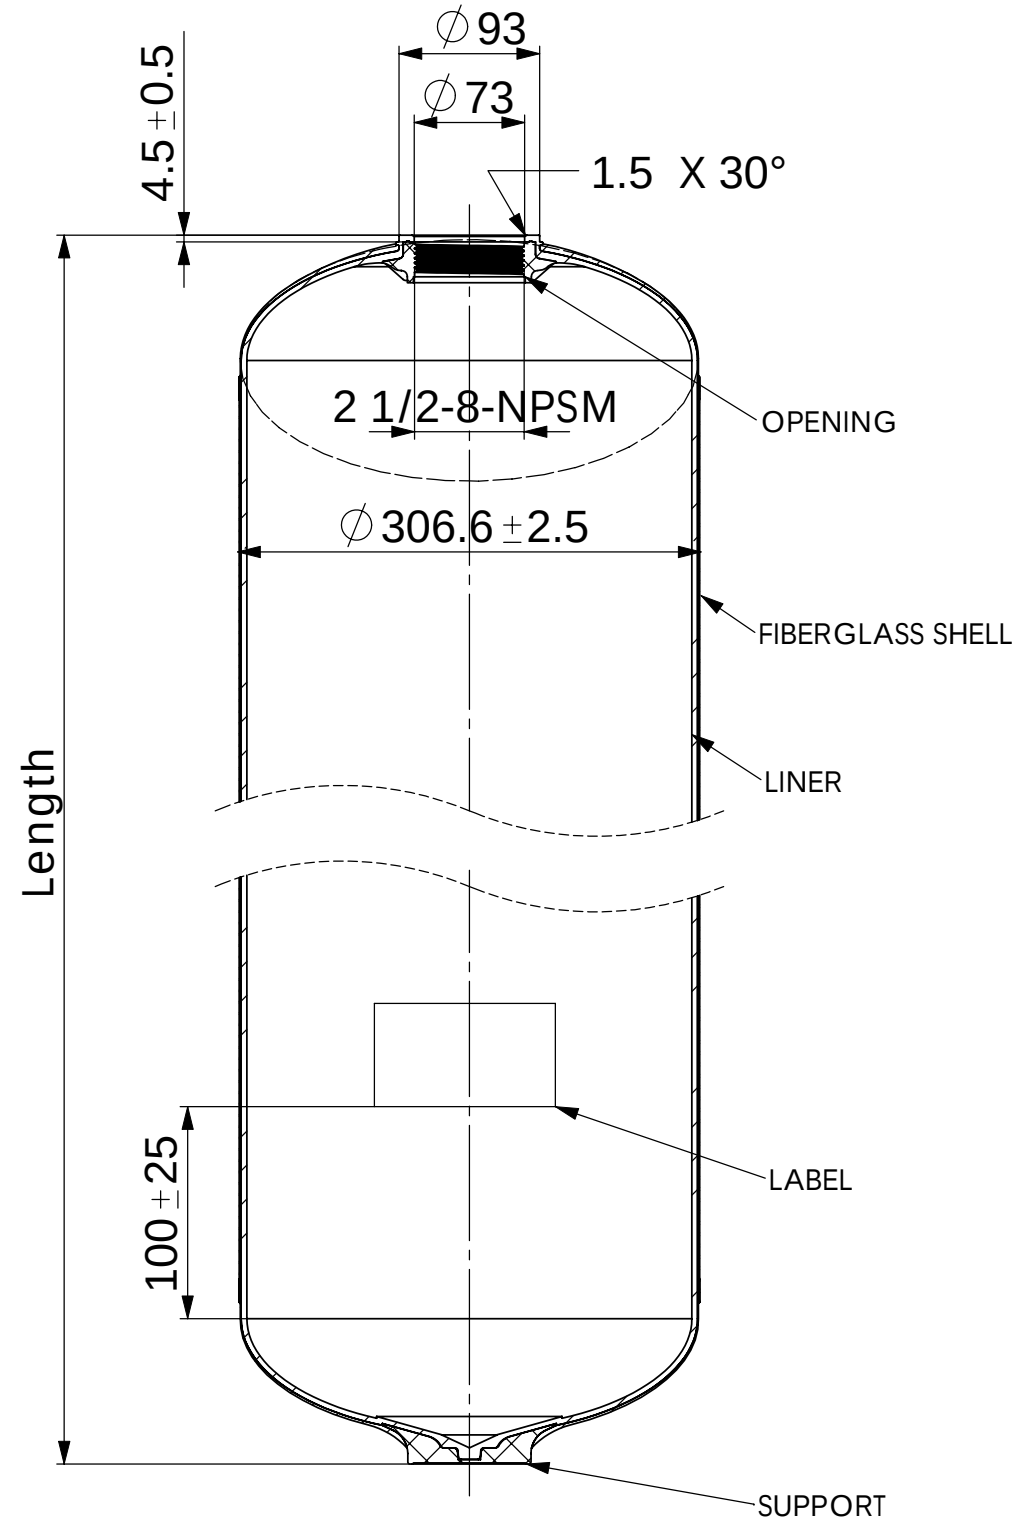

DATA SHEET							
MODEL	Length			VOLUME		WEIGHT	
	mm	inch	+/-	Liters	CU.Ft	Kg	LBS
12×17	434	17.09	4	23.6	0.83	3	6.6
12×48	1218	47.95	5	78.54	2.78	7.05	15.51
12×52	1324	52.13	5	84.7	2.99	7.59	16.7

NOTES:

- TANK MUST MEET ALL APPLICABLE SPECIFICATIONS OF NSF/ANSI 044 STANDARD,LATEST REVISION.
- OPERATING SPECIFICATIONS:
 - MAXIMUM WORKING PRESSURE - 150PSI (10.5BAR)
 - TEMPERATURE RANGE - 34-122 °F (1-50 °C)
 - MAXIMUM VACUUM - 5.5"Hg (140mm Hg)
 - MEDIA - WATER
- TEST REQUIRMENT
 - BURST PRESSURE TEST: 4.2MPa
 - CYCLIC PRESSURE TEST: 1.05MPa / 100,000 CYCLES
 - HYDROSTATIC PRESSURE TEST: 2.52MPa / KEEP 15MINS
- VISUAL LINER INSPECTION
 - NO MORE THAN 10 INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS.
 - NO INTERNAL OR EXTERNAL BLEMISHES OR BURNT DEBRIS LARGER THAN 3 x 3mm
 - NO INTERNAL BLEMISHES OR BURNT DEBRIS ALLOWED
- ALL GLASS STRANDS FROM FIBERGLASS LINER TO BE BONDED AND COVERED
- LABEL'S POSITION CAN BE CHANGED WITH THE CUSTOMER'S REQUIREMENT

				開能 CANATURE GROUP Canature			
				12" FRP PRESSURE VESSEL			
VERSION NO.	DESCRIPTION OF CHANGES:			SIGNATURE	DATE		
DESIGNER		STANDARD	STAGE REMARK	NUMBER /SET	SCALE	/	
				1	1:5	MATERIAL:	
INSPECTION		AUTHORIZATION	PROJECTION	FRP-PV.12.00			
TECHNOLOGIST			TOTAL PAGES:	PAGE NO.			