
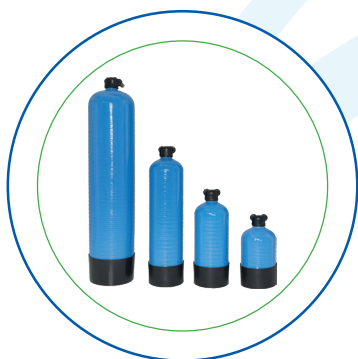


NEUTRACALC

Green Solution to prevent scale

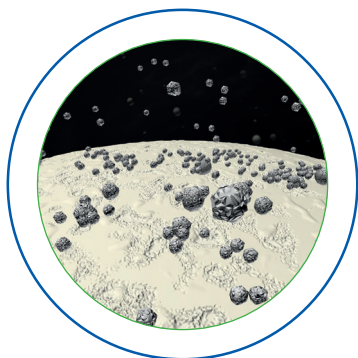


”

From Point of Use
to Point of Entry.



NEUTRACALC

For years PWG has tested many different water treatment media that were supposed to prevent scale deposits in pipes. No media came close to achieving this until PWG discovered a new active media called NEUTRACALC. After extensive testing, we can say that this product produces good results, both in the short and long term. It is with pleasure that we introduce NEUTRACALC, a green solution for Point of Use (POU) and for Point of Entry (POE).

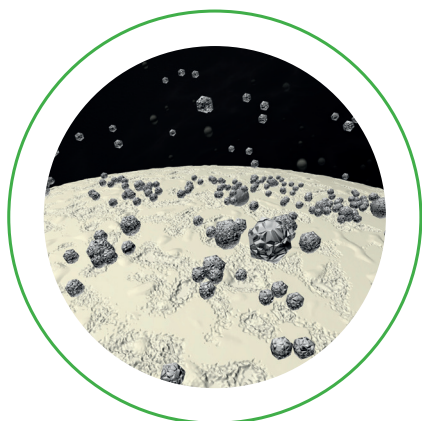

THE TECHNOLOGY

Each bead is covered with imperfections called media templates that attract minerals (Calcium, Hydrogen carbonates) and combine them to form micro-crystals that slowly grow. They then break off and float freely through the system. These crystals make their way through plumbing systems without sticking to pipes, fixtures, valves or heating elements. The first scale prevention media based system was born: NEUTRACALC.

POINT OF USE RANGE

For local protection where space is a tight. A versatile solution that can be adapted to customer needs.



APPLICATIONS

Treats cold water before it enters an appliance using hot water e.g. water heater, hot-beverage system or steamer.



POINT OF ENTRY RANGE

To protect the complete water circuit of houses and buildings against scale formation, the NEUTRACALC point of entry range delivers adjustable flow rates and does not require any maintenance during its entire life span.



REFERENCE	CODE	DESCRIPTION	FLOW RATE	CONNECTION SIZE
5002124302	NC10" SL	NeutrAcalC 10 SL	4 lpm	3/4" F BSP
5002124303	NC10" BB	NeutrAcalC 10 BB	10 lpm	1" F BSP
5002124304	NC817	NeutrAcalC 817	15 lpm	3/4" M BSP
5002124305	NC835	NeutrAcalC 835	38 lpm	1" M BSP
5002124306	NC935	NeutrAcalC 935	45 lpm	1" M BSP
5002124307	NC1035	NeutrAcalC 1035	60 lpm	1" M BSP
5002124308	NC1054	NeutrAcalC 1054	75 lpm	1" M BSP
5002124309	NC1252	NeutrAcalC 1252	113 lpm	1" M BSP

APPLICATIONS

Treats cold water at the point of entry before it enters a hot-water appliance.
Multiple units can be used for a higher flow rate.



WHY NEUTRACALC?

- Prevent scale formation:
 - Eco-friendly: no use of regenerants, no chloride in drain water
 - No rinsing after regeneration: water saving
 - Full recovery: continuous water supply, no regeneration
 - No electricity & compact solution: easy installation
 - No change in the chemical composition: minerals remain in the water
 - No effect on corrosion
- To maintain the efficiency of your water boiler and heating system
- To protect all appliances that use hot water

TIPS & TRICKS TO KEEP NEUTRACALC ACTIVE OVER THE YEARS

- Do not install Neutracalc on a new copper installation, as copper ions will attach to the media and prevent it from neutralizing the calcium ions.
- Replace the media every year for POU and every 3 years for POE to optimize performance.
- Do not use chemicals that are incompatible with the applied technology.
- A small deposit on the metal surface is absolutely normal as crystals are still in solution. This deposit can easily be wiped off using a dry cloth. Note, the surface may be bright or dull but it does not affect the use or performance of the device.

APPLICATIONS FOR NEUTRACALC



RESIDENTIAL
Home appliances, boilers and heaters



HORECA & COMMERCIAL USE
Hot water & heating systems, washing machines, dish washers,...